
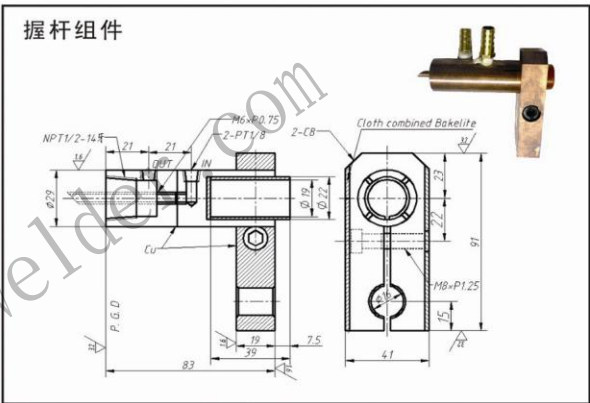
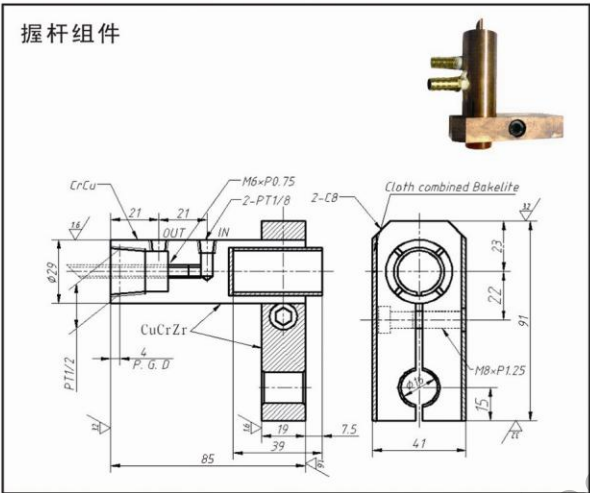
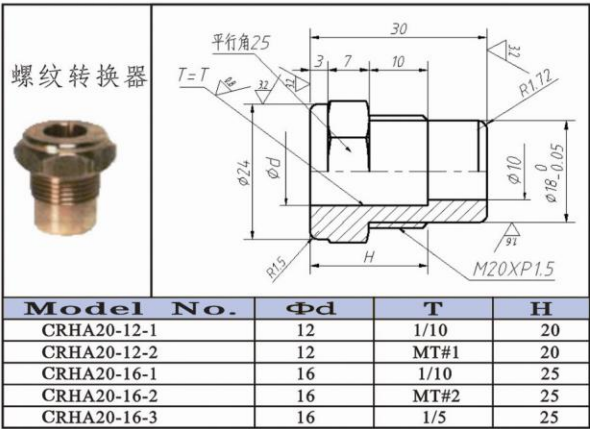
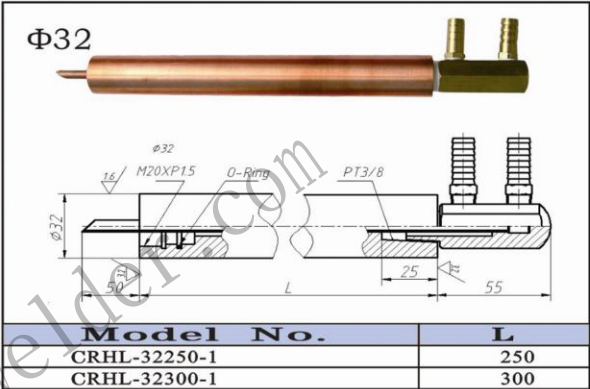
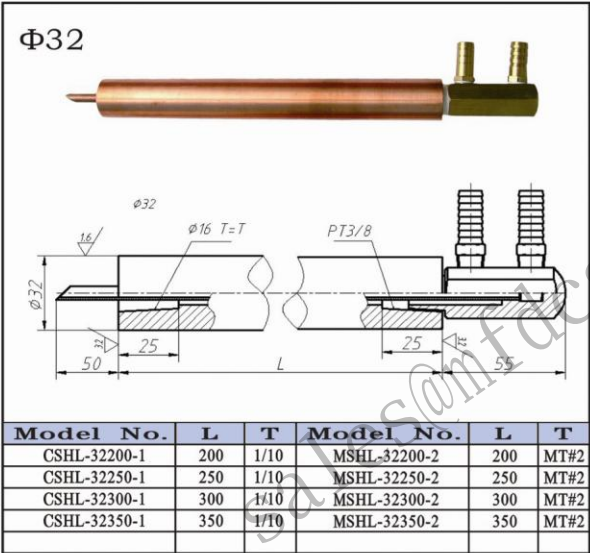
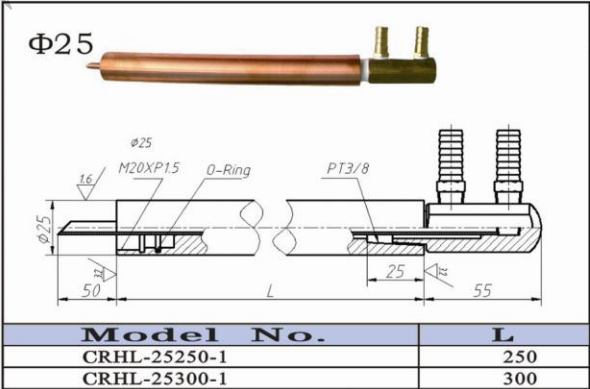






电极握杆

材质：铬锆铜

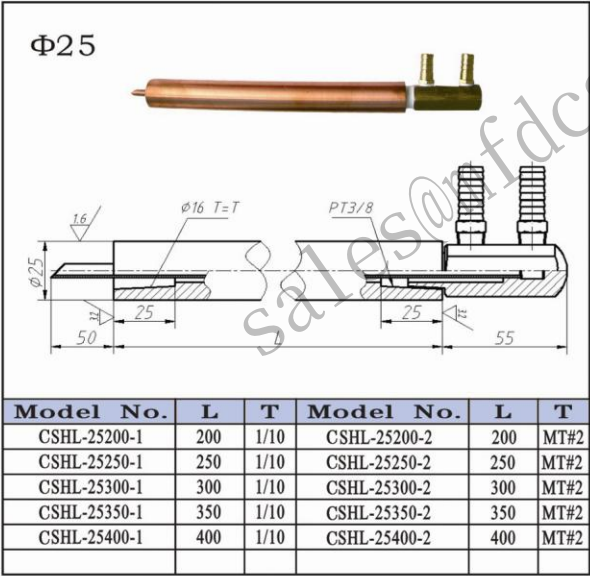


L型握杆 (90°) (L Type Holders)

Material: BSBM

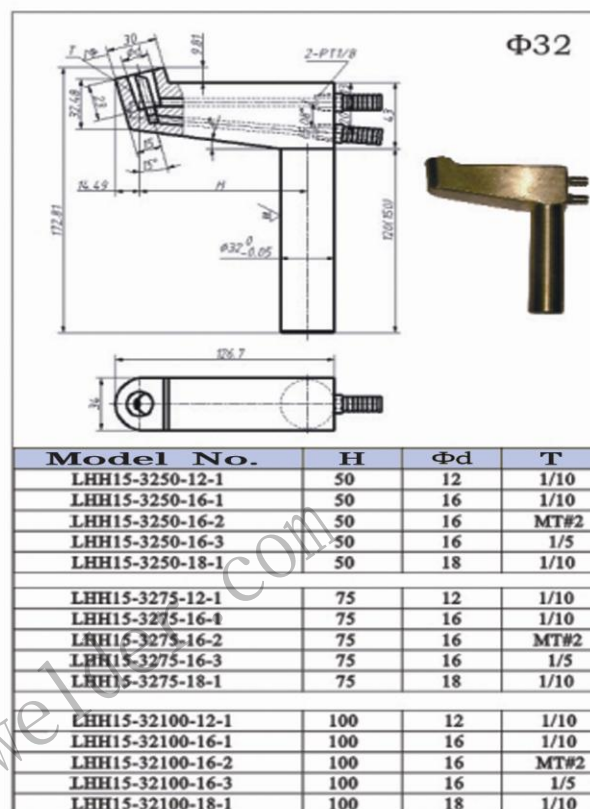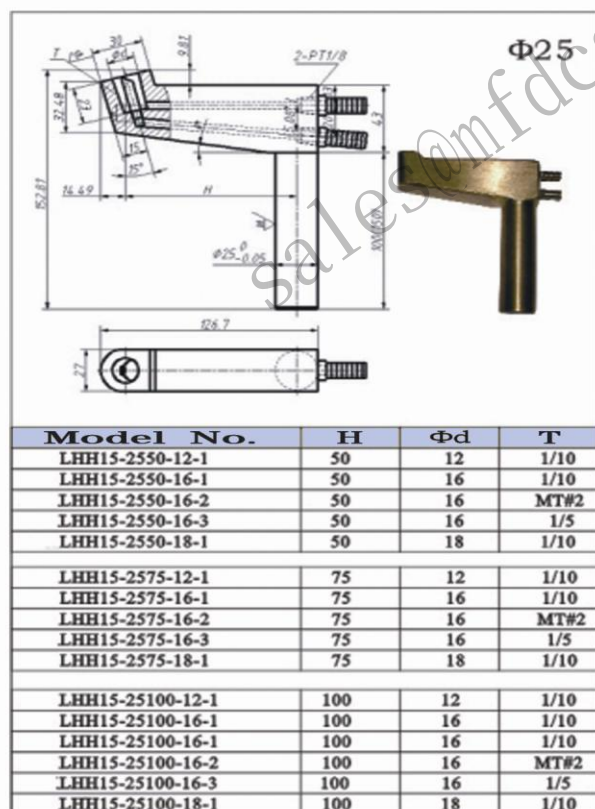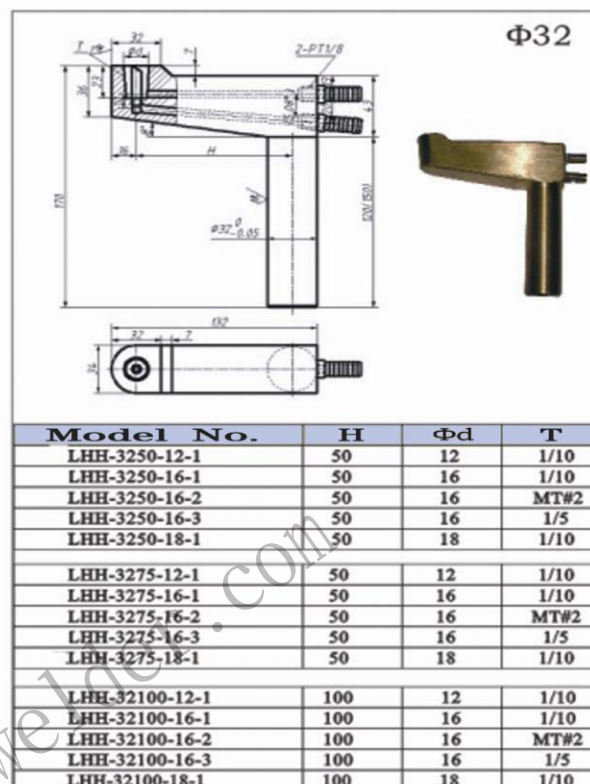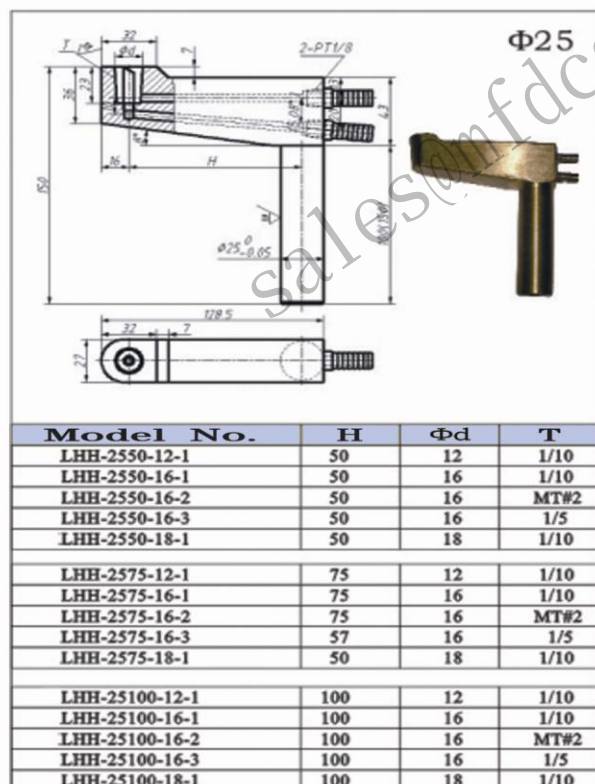


Φ55

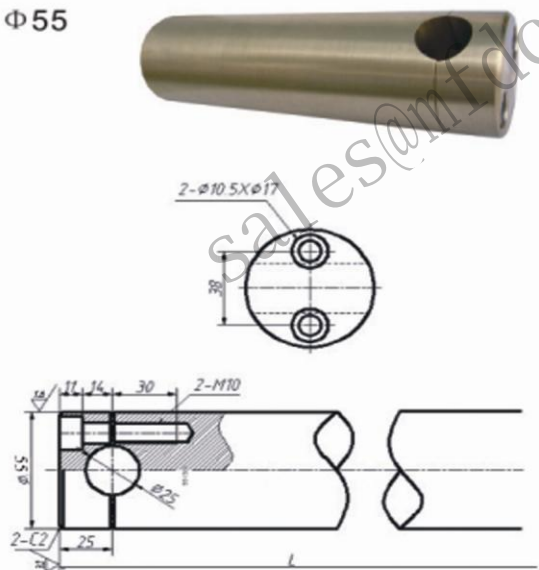


Model No.	L	Model No.	L
H-25-55200	200	KH-25-55350	350
H-25-55250	250	KH-25-55400	400
H-25-55300	300		

Φ70

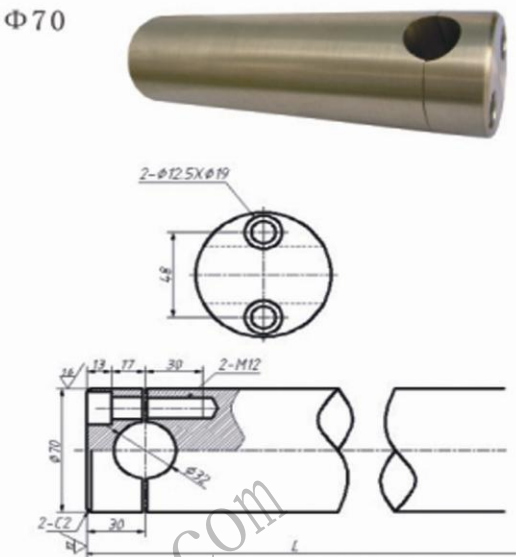


Model No.	L
H-32-70200	200
H-32-70250	250
H-32-70300	300
H-32-70350	350
H-32-70400	400

Φ60

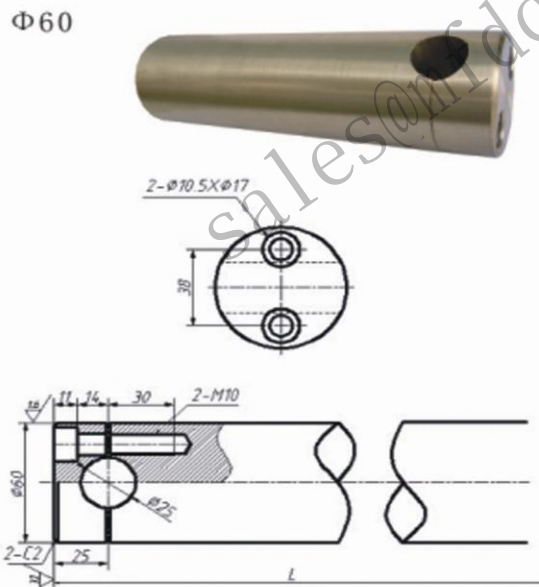

Model No.	L	Model No.	L
H-25-60200	200	KH-25-60350	350
H-25-60250	250	KH-25-60400	400
H-25-60300	300		

Φ80

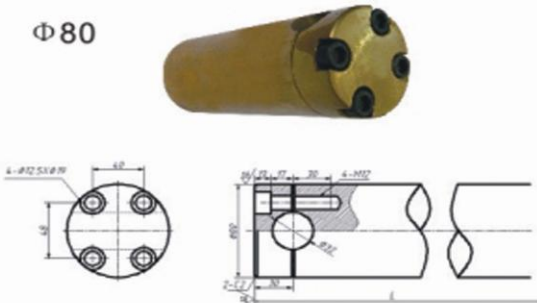


Model No.	L
H-32-80200	200
H-32-80250	250
H-32-80300	300




凸焊台



半圆夹

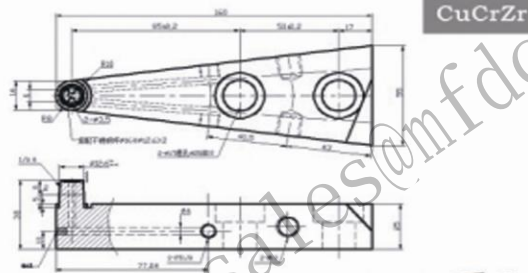


三角握杆 HD-53

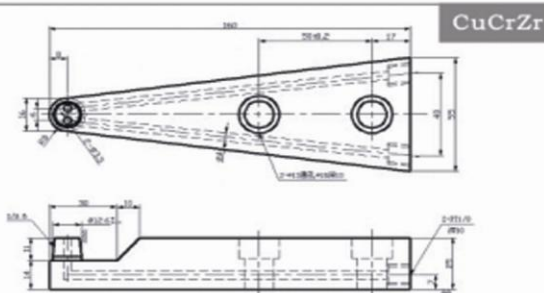


三角握杆 HD-54

F型通水接头(Hose Connector)
(BSBM)
FH-3/8


Model No.	D
FH19-3/8	19
FH22-3/8	22

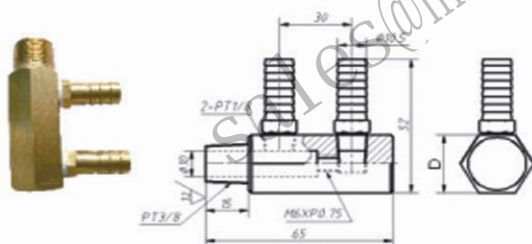

直通水接头(Hose Connector)
(BSBM)
FG-1/8

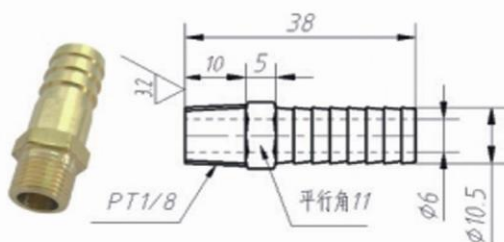


L型通水接头(Hose Connector)
(BSBM)
FHG-1/8

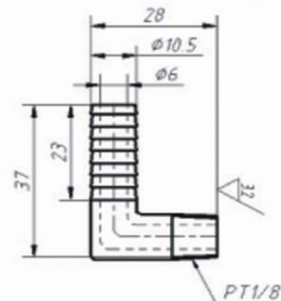

水冷铜管(Pipe For Cooling)
(Cu)


Model No.	L
PC6x4xL	300、350、400、450、500

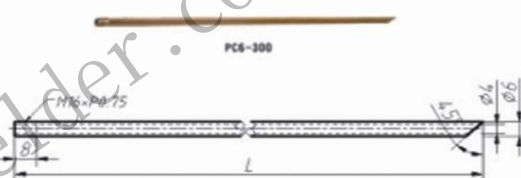

耐热冷却水管(Tube For Cooling)
(TEFLON)

耐高温达300℃,柔软可转弯,适合使用在弯电极与连杆及L型握杆冷却。

Model No.	L
PT4×2×L	1000、2000、3000...

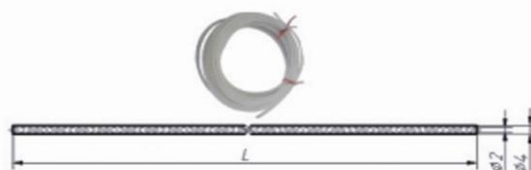

耐热冷却水管(Tube For Cooling)
(TEFLON)

耐高温达300℃,柔软可转弯,适合使用在弯电极与连杆及L型握杆冷却。

Model No.	L
PT6×4×L	1000、2000、3000...

